



D-19/D-252

Economical, **double belt-driven**, self-priming, twin diaphragm pump with 1hp. TEFC 120/240volt 60hz. motor (14amp), designed for general purpose spraying by the **entry-level contractor**.



Maximum Flow:	6 g.p.m.	Diaphragm:	dual semi-hydraulic
Maximum Pressure:	200 p.s.i. (*275 p.s.i.)	Shaft:	3/4" diameter (solid)
Maximum Speed:	650 r.p.m.	Housing:	anodized aluminum
Weight (pump only):	10 lbs. (4.5 kg.)	Dimensions:	16.6" x 10" x 13.5"
Weight (pump & motor):	74 lbs. (33.6 kg.)		42.2cm x 25.4cm 34.3cm

* Maximum pressure of pump with appropriately sized motor.


Port Size	Pump Only	Pump w/Control Assembly
inlet	3/4"	3/4" hose barb
outlet	1/2"	3/8" hose barb
bypass	----	1/2" hose barb

[hoses not included]

Includes: control bypass assembly with pressure gauge and shut-off ball valve, fittings for input, discharge and bypass recirculation hoses. Units are mounted on a steel base with a belt guard and a convenient carrying handle and are easily cleaned by running water through the system for a few minutes immediately after use. (230volt/50hz. available for export)

M-03

Economical, **direct-drive**, self-priming, triple diaphragm pump with 1 hp. TEFC 120/240volt 60hz. motor (14 amp), designed for general purpose spraying by the **entry-level contractor** as well as the **professional contractor**.

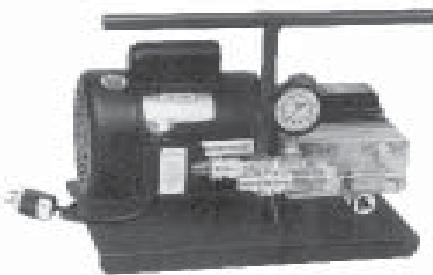

Maximum Flow:	3 g.p.m.	Diaphragm:	triple semi-hydraulic
Maximum Pressure:	400 p.s.i. (*1000 p.s.i.)	Shaft:	56 - C face
Maximum Speed:	1725 r.p.m.	Housing:	aluminum and brass
Weight (pump only):	25 lbs. (11.4 kg.)	Dimensions:	9.8125" x 10.25" x 7.5"
Weight (pump & motor):	69 lbs. (31.3 kg.)		24.9cm. x 26.0cm. x 19.1cm.

* Maximum pressure of pump with appropriately sized motor.


Port Size	Pump Only	Pump w/Control Assembly	Q.D. Coupler
inlet	1/2" NPT	3/4" hose barb	3/4"
outlet	3/8" NPT	3/8" hose barb	3/8"
bypass	---	1/2" hose barb	1/2"

[hoses not included]

Includes: control bypass assembly with pressure gauge and shut-off ball valve, **quick disconnect fittings** for input, discharge and bypass recirculation hoses. Units are mounted on a steel base with a belt guard and a convenient carrying handle and are easily cleaned by running water through the system for a few minutes immediately after use. (230volt/50hz. available for export)

MP-20

High quality, **double belt-driven**, self-priming, twin diaphragm pump with 1hp. TEFC 120/240volt 60hz. motor (14amp), offers easy, reliable operation, making this pump ideal for the **professional contractor**.

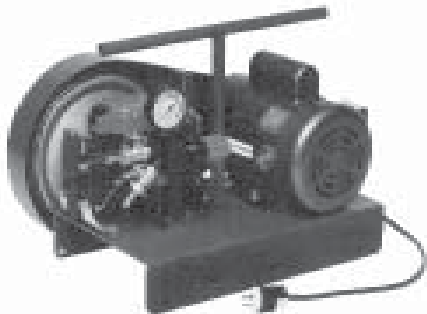

Maximum Flow:	5.7 g.p.m.	Diaphragm:	dual semi-hydraulic
Maximum Pressure:	200 p.s.i. (*426 p.s.i.)	Shaft:	3-bolt flange
Maximum Speed:	550 r.p.m.	Housing:	aluminum
Weight (pump only):	31 lbs. (14.2 kg.)	Dimensions:	10.25" x 8.4375" x 8.625"
Weight (pump & motor):	82 lbs. (37.2 kg.)		26.0cm. x 21.4cm x 21.9cm.

* Maximum pressure of pump with appropriately sized motor.

Port Size	Pump Only	Pump w/Control Assembly
inlet	3/4"	7/8" hose barb
outlet	3/8"	3/8" hose barb
bypass	1/2"	1/2" hose barb

[hoses not included]

Includes: control bypass assembly with pressure gauge and shut-off ball valve, fittings for input, discharge and bypass recirculation hoses. Units are mounted on a steel base with a belt guard and a convenient carrying handle and are easily cleaned by running water through the system for a few minutes immediately after use. (230volt/50hz. available for export.)